

5



APP PAIRING PROCESS

5.1 –

Download the
hOn App




Download on the
App Store

ANDROID APP ON
Google play

EXPLORE IT ON
AppGallery

5.2 –

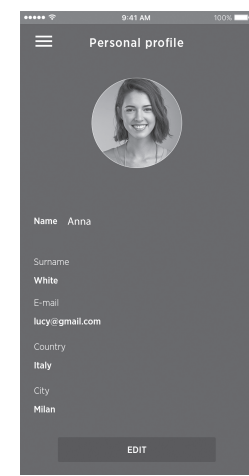


5.3 –

2.4 GHz band only



Home Wi-Fi:
-Name
-Password

5.4 –

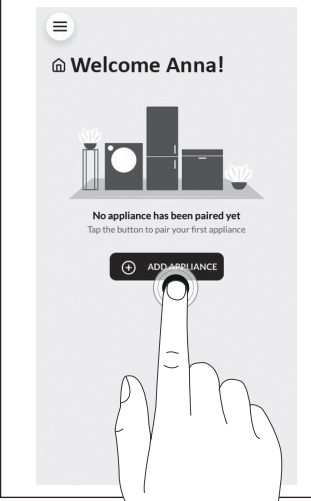


5.5 –

Follow pairing instructions



5.6 –

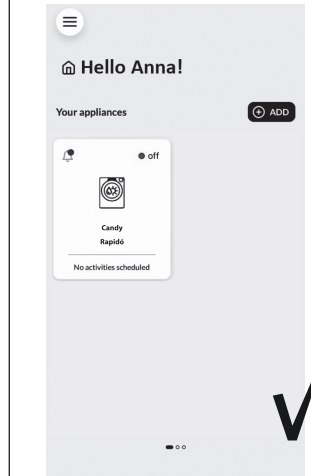


6



REMOTE CONTROL ACTIVATION - DAILY USAGE


6.1 –

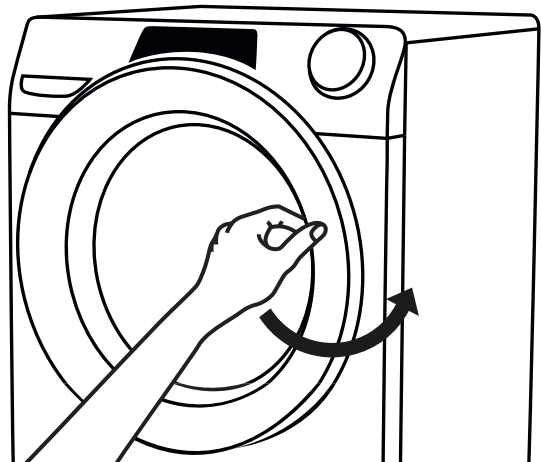

6.2 –



6.3 –

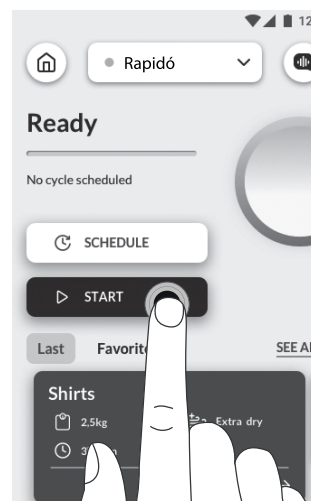

EN

Download the **Candy hOn** App

To download any other further information in your language, please go to:

go.he.services/wd-hon

IT

Scaricare l'app **Candy hOn**

Per ulteriori informazioni collegarsi al sito:

go.he.services/wd-hon

DE

Laden Sie die **Candy hOn** App aus dem App Store herunter.

Um weitere Informationen in Ihrer Sprache herunterzuladen, gehen Sie bitte zu:

go.he.services/wd-hon

ES

Descarga la App **hOn** de Candy

Para descargar más información en tu idioma, visita:

go.he.services/wd-hon

FR

Téléchargez l'application **Candy hOn**

Pour télécharger toute autre information dans votre langue, rendez-vous sur:

go.he.services/wd-hon

BG

Изтеглете приложението **Candy hOn** от магазина за приложения

За да изтеглите допълнителна информация на вашия език, моля, отидете на:

go.he.services/wd-hon

HR

Preuzmite **Candy hOn** aplikaciju preko App storea

Za preuzimanje ostalih informacija na vašem jeziku, molim posjetite:

go.he.services/wd-hon

HU

Töltse le a **Candy hOn** applikációt az App store-ból

További információért kérjük, látogasson el a:

go.he.services/wd-hon

SL

Iz trgovine z aplikacijami prenesite aplikacijo **Candy hOn**

Do več informacij v svojem jeziku lahko dostopate na naslovu:

go.he.services/wd-hon

SR

Preuzmite **Candy hOn** Aplikaciju sa Vaše prodavnice

Kako bi preuzeli bilo koje druge informacije na Vašem jeziku, molimo posetite:

go.he.services/wd-hon

CS

Stáhněte si aplikaci **Candy hOn** App z obchodu App store

Chcete-li stáhnout další doplňující informace ve vašem jazyce, navštivte prosím stránku:

go.he.services/wd-hon

PL

Pobierz aplikację **Candy hOn** z App store

Aby pobrać dodatkowe informacje w Twoim języku, przejdź na stronę:

go.he.services/wd-hon

RO

Descărcați aplicația **Candy hOn** din App store

Pentru a descărca mai multe informații în limba dumneavoastră, vă rugăm să accesați:

go.he.services/wd-hon

SK

Stiahnite si aplikáciu **Candy hOn** App z obchodu App store

Pre doplňujúce informácie a možnosť ich stiahnutia vo vašom jazyku, prosím navštívte stránku:

go.he.services/wd-hon

TR

Candy hOn Uygulamasını indirin

Kendi dilinizde daha fazla farklı bilgi indirmek için:

go.he.services/wd-hon

UKR

Завантажте додаток **Candy hOn** з "App store"

Щоб завантажити будь-яку іншу додаткову інформацію, перейдіть на сторінку:

go.he.services/wd-hon

EL

Κατεβάστε την εφαρμογή **Candy hOn** από το App Store

Για να κατεβάσετε περισσότερες πληροφορίες στη γλώσσα σας, παρακαλώ επισκεφθείτε την ιστοσελίδα:

go.he.services/wd-hon

NL

Download de **Candy hOn** App in de App store

U kan in de toekomst verdere informatie in uw moedertaal downloaden via:

go.he.services/wd-hon

PT

Descarregue a aplicação **Candy hOn** da App Store

Para descarregar mais informações na sua língua, por favor aceda a:

go.he.services/wd-hon

DA

Download vores **Candy hOn** App fra App store

For download af yderligere informationer på Dansk, besøg:

go.he.services/wd-hon

SV

Ladda ner **Candy hOn** appen från App Store / Play Butik

Om nedladdning behövs för ytterligare information på det egna språket, gå till:

go.he.services/wd-hon

FI

Lataa **Candy hOn** sovellus App Storesta

Lataa lisätietoja osoitteesta:

go.he.services/wd-hon

NO

Last ned **Candy hOn** App fra App Store / Play-butikken

Hvis du laster ned nødvendig ytterligere informasjon på sitt eget språk, gå til:

go.he.services/wd-hon

CANDY

RAPIDÓ



70057639



To download any other further information in your language, please go to:
go.he.services/wd-hon

1

INSTALLATION



2

PROGRAM START



3

FILTER MAINTENANCE



4

PROGRAM LIST



5

APP PAIRING PROCESS





6

REMOTE CONTROL ACTIVATION



Download the hOn App



1.1




Diagram 1.1 illustrates the removal of the front panel. The main illustration shows the front panel being lifted off the cabinet frame. Two screws are indicated with arrows and a wrench. The four circular insets (A, B, C, D) show the step-by-step process of unscrewing the panel:

- A: A wrench is applied to the screw head.
- B: The screw is turned counter-clockwise.
- C: The screw is pulled out.
- D: The screw is removed from the panel.

The diagram illustrates two installation options for the sink drain:

- Left Option:** Shows a direct connection from the sink drain to the floor drain. A vertical dimension line indicates a maximum height of 100 cm. An optional U-bend connection is shown in a circular inset with an asterisk (*).
- Right Option:** Shows a connection with a higher maximum height of 2,6 mt. A circular inset shows a detail of the connection with a minimum clearance of 4 cm, also marked as optional (*).

A


1.4

B

Figure 1 consists of two panels, C and D, illustrating the experimental setup. Panel C shows a hand holding a probe against a rotating motor, with a curved arrow indicating the direction of rotation. Panel D shows a power cord being plugged into a wall outlet, with a straight arrow indicating the direction of the action.


D

Diagram D shows a hand plugging a power cord into a wall outlet. A large black arrow points from the outlet towards the right, indicating the direction of the action.

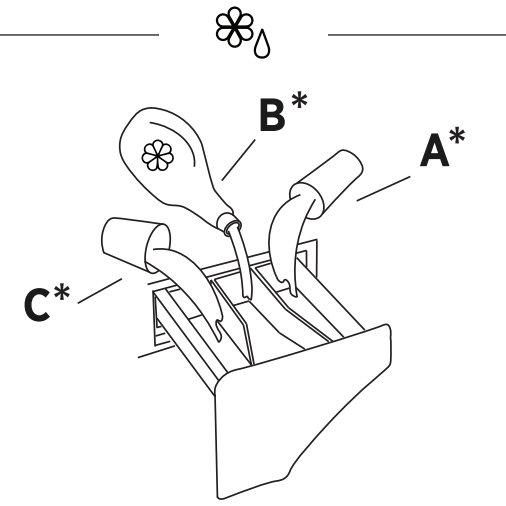

EN	A: Prewash B: Softeners C: Washing
IT	A: Prelavaggio B: Ammorbidente C: Lavaggio
DE	A: Vorwäsche B: Weichspüler C: Waschen
ES	A: Prelavado B: Suavizante C: Lavado
FR	A: Prelavage B: Adoucissant C: Washing
BG	A: Предпране B: Омекоцитител C: Пране
HR	A: Ön yıkama B: Yumuşatıcılar C: Yıkama
TR	A: Pretpranje B: Omeksişacı C: Pranje
HU	A: Előmosás B: Óblító C: Mosás
SL	A: Predpranje B: Mehčalec C: Pranje
SR	A: Predpranje B: Omeksišać C: Pranje
CS	A: Předpírka B: Změkčovačla C: Praní
PL	A: Pranie Wstępne B: Środek Zmiękczący C: Pranie
RO	A: Prespălare B: Balsam De Rufe C: Spălare
SK	A: Predpírka B: Zmäčkovač C: Pranie
UKR	A: Попереднє Прання B: Помякшувач C: Прання
EL	A: Προ-Πλύση B: Μαλακτικά C: Κυριως Πλύση
NL	A: Voorwas B: Wasverzachter C: Hoofdwass
PT	A: Pré Lavagem B: Aditivos C: Lavagem
DA	A: Forvask B: Blødgøringsmidler C: Vask
SV	A: Förtvätt B: Sköljmedel C: Tvätt
FI	A: Espesu B: Huuhteluaine C: Pesu
NO	A: Forvask B: Skylløs C: Vask

2.0 – FIRST START/RESET

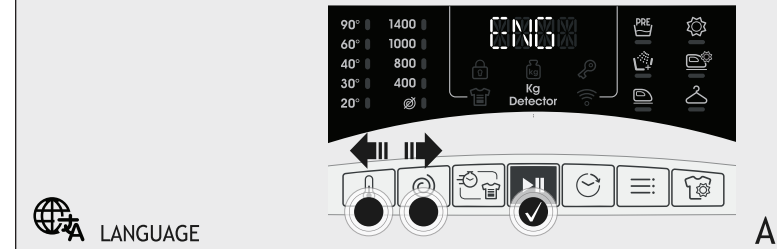

The diagram illustrates the control panel interface for selecting water hardness. The top screen shows three options: L1-SOFT, L2-MID, and L3-HARD. The bottom screen displays the 'Kg Deflector' and a 'Water Hardness' icon. The bottom row of buttons includes a 'Water Hardness' button with a checkmark.

*Options

	PRE WASH		EXTRA RINSE		EASY IRON
---	----------	---	-------------	---	-----------

*not available for all cycles

The diagram illustrates the control panel of the Candy RapidO oven. At the top left, the brand name "CANDY" and the model "RapidO" are displayed. The central digital display shows the temperature (90°, 60°, 40°, 30°, 20°) and the weight (1400g, 1000g, 800g, 600g, 400g). Below the display is a "Kg Detector" icon. To the right of the display is a "hOn" icon. On the far right is a circular clock face with a dial for temperature (30°, 50°, 70°, 90°, 110°, 130°, 150°, 170°, 190°, 210°, 230°, 250°, 270°, 290°, 310°, 330°, 350°, 370°, 390°, 410°, 430°, 450°, 470°, 490°, 510°, 530°, 550°, 570°, 590°, 610°, 630°, 650°, 670°, 690°, 710°, 730°, 750°, 770°, 790°, 810°, 830°, 850°, 870°, 890°, 910°, 930°, 950°, 970°, 990°, 1010°, 1030°, 1050°, 1070°, 1090°, 1110°, 1130°, 1150°, 1170°, 1190°, 1210°, 1230°, 1250°, 1270°, 1290°, 1310°, 1330°, 1350°, 1370°, 1390°, 1410°, 1430°, 1450°, 1470°, 1490°, 1510°, 1530°, 1550°, 1570°, 1590°, 1610°, 1630°, 1650°, 1670°, 1690°, 1710°, 1730°, 1750°, 1770°, 1790°, 1810°, 1830°, 1850°, 1870°, 1890°, 1910°, 1930°, 1950°, 1970°, 1990°, 2010°, 2030°, 2050°, 2070°, 2090°, 2110°, 2130°, 2150°, 2170°, 2190°, 2210°, 2230°, 2250°, 2270°, 2290°, 2310°, 2330°, 2350°, 2370°, 2390°, 2410°, 2430°, 2450°, 2470°, 2490°, 2510°, 2530°, 2550°, 2570°, 2590°, 2610°, 2630°, 2650°, 2670°, 2690°, 2710°, 2730°, 2750°, 2770°, 2790°, 2810°, 2830°, 2850°, 2870°, 2890°, 2910°, 2930°, 2950°, 2970°, 2990°, 3010°, 3030°, 3050°, 3070°, 3090°, 3110°, 3130°, 3150°, 3170°, 3190°, 3210°, 3230°, 3250°, 3270°, 3290°, 3310°, 3330°, 3350°, 3370°, 3390°, 3410°, 3430°, 3450°, 3470°, 3490°, 3510°, 3530°, 3550°, 3570°, 3590°, 3610°, 3630°, 3650°, 3670°, 3690°, 3710°, 3730°, 3750°, 3770°, 3790°, 3810°, 3830°, 3850°, 3870°, 3890°, 3910°, 3930°, 3950°, 3970°, 3990°, 4010°, 4030°, 4050°, 4070°, 4090°, 4110°, 4130°, 4150°, 4170°, 4190°, 4210°, 4230°, 4250°, 4270°, 4290°, 4310°, 4330°, 4350°, 4370°, 4390°, 4410°, 4430°, 4450°, 4470°, 4490°, 4510°, 4530°, 4550°, 4570°, 4590°, 4610°, 4630°, 4650°, 4670°, 4690°, 4710°, 4730°, 4750°, 4770°, 4790°, 4810°, 4830°, 4850°, 4870°, 4890°, 4910°, 4930°, 4950°, 4970°, 4990°, 5010°, 5030°, 5050°, 5070°, 5090°, 5110°, 5130°, 5150°, 5170°, 5190°, 5210°, 5230°, 5250°, 5270°, 5290°, 5310°, 5330°, 5350°, 5370°, 5390°, 5410°, 5430°, 5450°, 5470°, 5490°, 5510°, 5530°, 5550°, 5570°, 5590°, 5610°, 5630°, 5650°, 5670°, 5690°, 5710°, 5730°, 5750°, 5770°, 5790°, 5810°, 5830°, 5850°, 5870°, 5890°, 5910°, 5930°, 5950°, 5970°, 5990°, 6010°, 6030°, 6050°, 6070°, 6090°, 6110°, 6130°, 6150°, 6170°, 6190°, 6210°, 6230°, 6250°, 6270°, 6290°, 6310°, 6330°, 6350°, 6370°, 6390°, 6410°, 6430°, 6450°, 6470°, 6490°, 6510°, 6530°, 6550°, 6570°, 6590°, 6610°, 6630°, 6650°, 6670°, 6690°, 6710°, 6730°, 6750°, 6770°, 6790°, 6810°, 6830°, 6850°, 6870°, 6890°, 6910°, 6930°, 6950°, 6970°, 6990°, 7010°, 7030°, 7050°, 7070°, 7090°, 7110°, 7130°, 7150°, 7170°, 7190°, 7210°, 7230°, 7250°, 7270°, 7290°, 7310°, 7330°, 7350°, 7370°, 7390°, 7410°, 7430°, 7450°, 7470°, 7490°, 7510°, 7530°, 7550°, 7570°, 7590°, 7610°, 7630°, 7650°, 7670°, 7690°, 7710°, 7730°, 7750°, 7770°, 7790°, 7810°, 7830°, 7850°, 7870°, 7890°, 7910°, 7930°, 7950°, 7970°, 7990°, 8010°, 8030°, 8050°, 8070°, 8090°, 8110°, 8130°, 8150°, 8170°, 8190°, 8210°, 8230°, 8250°, 8270°, 8290°, 8310°, 8330°, 8350°, 8370°, 8390°, 8410°, 8430°, 8450°, 8470°, 8490°, 8510°, 8530°, 8550°, 8570°, 8590°, 8610°, 8630°, 8650°, 8670°, 8690°, 8710°, 8730°, 8750°, 8770°, 8790°, 8810°, 8830°, 8850°, 8870°, 8890°, 8910°, 8930°, 8950°, 8970°, 8990°, 9010°, 9030°, 9050°, 9070°, 9090°, 9110°, 9130°, 9150°, 9170°, 9190°, 9210°, 9230°, 9250°, 9270°, 9290°, 9310°, 9330°, 9350°, 9370°, 9390°, 9410°, 9430°, 9450°, 9470°, 9490°, 9510°, 9530°, 9550°, 9570°, 9590°, 9610°, 9630°, 9650°, 9670°, 9690°, 9710°, 9730°, 9750°, 9770°, 9790°, 9810°, 9830°, 9850°, 9870°, 9890°, 9910°, 9930°, 9950°, 9970°, 9990°, 10010°, 10030°, 10050°, 10070°, 10090°, 10110°, 10130°, 10150°, 10170°, 10190°, 10210°, 10230°, 10250°, 10270°, 10290°, 10310°, 10330°, 10350°, 10370°, 10390°, 10410°, 10430°, 10450°, 10470°, 10490°, 10510°, 10530°, 10550°, 10570°, 10590°, 10610°, 10630°, 10650°, 10670°, 10690°, 10710°, 10730°, 10750°, 10770°, 10790°, 10810°, 10830°, 10850°, 10870°, 10890°, 10910°, 10930°, 10950°, 10970°, 10990°, 11010°, 11030°, 11050°, 11070°, 11090°, 11110°, 11130°, 11150°, 11170°, 11190°, 11210°, 11230°, 11250°, 11270°, 11290°, 11310°, 11330°, 11350°, 11370°, 11390°, 11410°, 11430°, 11450°, 11470°, 11490°, 11510°, 11530°, 11550°, 11570°, 11590°, 11610°, 11630°, 11650°, 11670°, 11690°, 11710°, 11730°, 11750°, 11770°, 11790°, 11810°, 11830°, 11850°, 11870°, 11890°, 11910°, 11930°, 11950°, 11970°, 11990°, 12010°, 12030°, 12050°, 12070°, 12090°, 12110°, 12130°, 12150°, 12170°, 12190°, 12210°, 12230°, 12250°, 12270°, 12290°, 12310°, 12330°, 12350°, 12370°, 12390°, 12410°, 12430°, 12450°, 12470°, 12490°, 12510°, 12530°, 12550°, 12570°, 12590°, 12610°, 12630°, 12650°, 12670°, 12690°, 12710°, 12730°, 12750°, 12770°, 12790°, 12810°, 12830°, 128

2.2 – SETTING

The diagram illustrates the control panel for setting the soil level. The top display shows temperature (90°F to 20°F), weight (1400 to 200), and a 'Kg Deflector' icon. The bottom panel has buttons for temperature, deflector, soil level, pause, and other functions. A thermometer icon is shown next to the temperature button.

The diagram illustrates the control panel for setting the soil level. The top display shows temperature (90°F to 20°F), weight (1400 to 200), and a 'Kg Deflector' icon. The bottom panel has buttons for temperature, deflector, soil level, pause, and other functions. A thermometer icon is shown next to the temperature button.


The diagram illustrates the control panel for setting the soil level. The top display shows temperature (90°F to 20°F), weight (1400 to 200), and a 'Kg Deflector' icon. The bottom panel has buttons for temperature, deflector, soil level, pause, and other functions. A thermometer icon is shown next to the temperature button.

The diagram illustrates the control panel for setting the soil level. The top display shows temperature (90°F to 20°F), weight (1400 to 200), and a 'Kg Deflector' icon. The bottom panel has buttons for temperature, deflector, soil level, pause, and other functions. A thermometer icon is shown next to the temperature button.


*SOIL LEVEL

*not available for all cycles

2.4 DELAY START

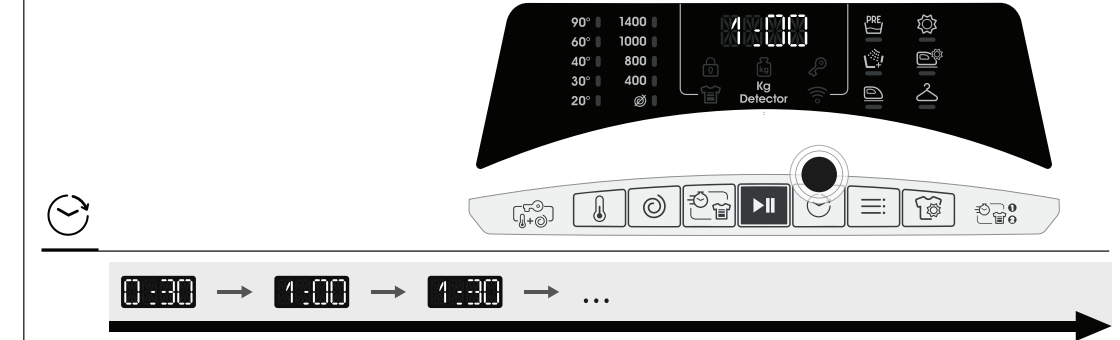

2.5 – DRYING OPTIONS



The diagram illustrates the control panel for the washing machine's drying options. On the left, a vertical menu lists three settings: **LIGHT** (represented by a sun icon), **MID** (represented by a sun and a gear icon), and **HIGH** (represented by a sun and a hanger icon). To the right of this menu is a large, curved digital display. The display shows a temperature scale on the left (90°, 60°, 40°, 30°, 20°) and a corresponding numerical value on the right (1400, 1000, 800, 400, 200). The current selection is 1400. The display also features a digital clock showing 1:00, a 'Kg Detector' icon, and various other icons including a lock, a hanger, and a sun. Below the display is a row of physical buttons: a hanger icon, a temperature icon, a circular arrow icon, a hanger icon, a play/pause button, a smiley face icon, a menu icon, and a hanger icon. A large circular dial is located to the right of these buttons.

3.1

		(MAX.)										°C			
		6 +4kg	7 +4kg	8 +5kg	9 +5kg	9 +6kg	10 +6kg	10 +7kg	12 +9kg	13 +8kg	14 +9kg		MAX	2	
	Cotton/ Mixed	6	7	8	9	9	10	10	12	13	14	40°	●	●	
	Cotton/ Mixed/ Delicates	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	-			
	Cotton	6	7	8	9	9	10	10	12	13	14	40°	●	●	
		3	3,5	4	4,5	4,5	5	5	6	6,5	7	40°	●	●	
	14'	1	1	1,5	1,5	1,5	1,5	1,5	2	2	2	40°	●	●	
	30'	2	2,5	2,5	2,5	2,5	2,5	2,5	3	3	3	40°	●	●	
	44'	3	3,5	3,5	3,5	3,5	3,5	3,5	4	4	4	40°	●	●	
	Wool/ Handwash	1	1	2	2	2	2	2	2,5	2,5	2,5	30°	●	●	
	Synthetics/ Mixed	3	3,5	4	4,5	4,5	5	5	6	6,5	7	60°	●	●	(●)
	All fabrics	-	-	-	-	-	-	-	-	-	-		△	●	
		-	-	-	-	-	-	-	-	-	-				
	Cotton	6	7	8	9	9	10	10	12	13	14	90°	●	●	(●)
ECO 40-60	Cotton	6	7	8	9	9	10	10	12	13	14	60°	●	●	
ECO 40-60 +	Cotton	4	4	5	5	6	6	7	9	8	9	-	●	●	
	Wool/ Delicates	1	1	1	1	1	1	1	1	1	1	-	-	-	-
	Synthetics/ Mixed	3	3,5	4	4,5	4,5	5	5	6	6,5	7	-	-	-	-
	Cotton	4	4	5	5	6	6	7	9	8	9	-	-	-	-
		WiFi													